

Panel Fasteners

For SIP and Nailable Applications

TRUFAST

Only TRUFAST offers **3** SIP Fasteners designed to provide job-matched performance in securing structural insulated panels to various wood and metal substrates!

Panel to Wood Applications: New TRUFAST SIPTP Thread Point

Panel to Steel Members: TRUFAST SIPHD Heavy Duty Drill Point (16 ga. to 3/16")

Panel to Corrugated Steel Decks: TRUFAST SIPLD Light Duty Drill Point (22 to 18 ga.)

Exclusive Star Drive for superior bit engagement



Length	SIPTP	SIPLD	Pkg. Qty.	Pallet Qty.
	Thread Point	Lt. Duty Drill Point		
2"	SIPTP-2000	NA	500/Pail	40,000
2-1/2"	SIPTP-2500	NA	500/Pail	40,000
3"	SIPTP-3000	SIPLD-3000	500/Pail	40,000
3-1/2"	SIPTP-3500	SIPLD-3500	500/Pail	40,000
4"	SIPTP-4000	SIPLD-4000	500/Pail	40,000
4-1/2"	SIPTP-4500	SIPLD-4500	500/Pail	40,000
5"	SIPTP-5000	SIPLD-5000	500/Pail	40,000
5-1/2"	SIPTP-5500	SIPLD-5500	500/Pail	40,000
6"	SIPTP-6000	SIPLD-6000	500/Pail	40,000
6-1/2"	SIPTP-6500	SIPLD-6500	500/Pail	40,000
7"	SIPTP-7000	SIPLD-7000	500/Pail	40,000
7-1/2"	SIPTP-7500	SIPLD-7500	500/Pail	40,000
8"	SIPTP-8000	SIPLD-8000	500/Pail	30,000
9"	SIPTP-9000	SIPLD-9000	250/Pail	15,000
10"	SIPTP-10000	SIPLD-10000	250/Pail	15,000
11"	SIPTP-11000	SIPLD-11000	250/Pail	15,000
12"	SIPTP-12000	SIPLD-12000	250/Pail	15,000
13"	SIPTP-13000	SIPLD-13000	250/Box	7,500
14"	SIPTP-14000	SIPLD-14000	250/Box	7,500
15"	SIPTP-15000	SIPLD-15000	250/Box	7,500
16"	SIPTP-16000	SIPLD-16000	250/Box	7,500
18"	SIPTP-18000	SIPLD-18000	250/Box	7,500

NOTE: Two T-30 Driver Bit included in each package.

Length	SIPHD	Pkg. Qty.	Pallet Qty.
	Hvy. Duty Drill Point		
6"	SIPHD-6000	500/Pail	30,000
8"	SIPHD-8000	250/Pail	40,000
9-3/4"	SIPHD-9750	250/Pail	15,000
11-3/4"	SIPHD-11750	250/Pail	15,000
13-3/4"	SIPHD-13750	250/Box	7,500


NOTE: Two T-30 Driver Bit included in each package.




Engineered Fastening Solutions
for the Construction Industry™

TRUFAST SIP Fastener Specifications


SIPTP Thread Point

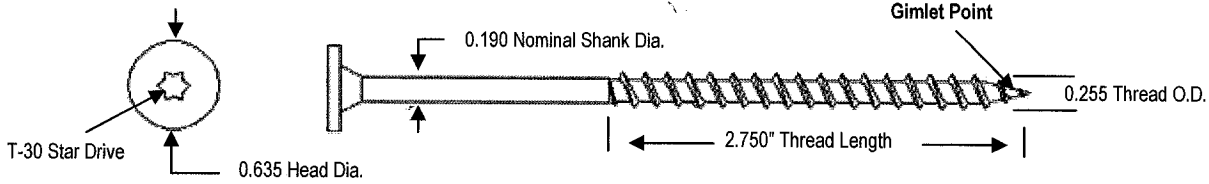

SIPHD Heavy Duty Drill Point

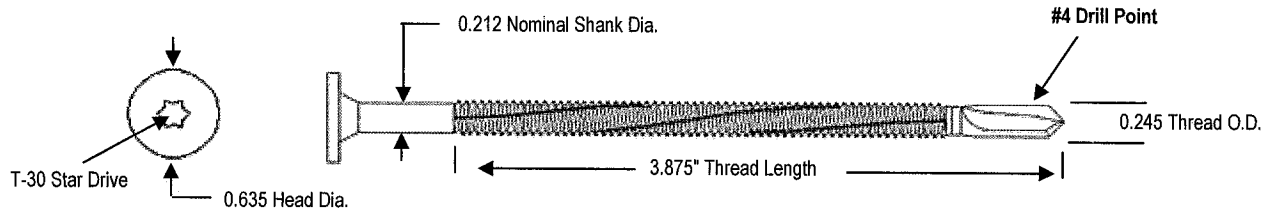

SIPLD Light Duty Drill Point

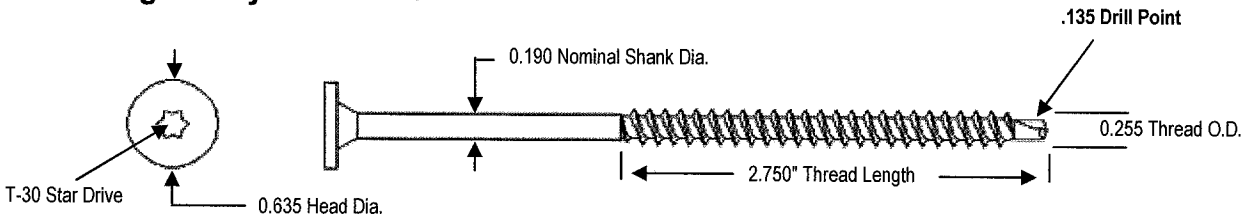

Average Ultimate Withdrawal Values

	WOOD							STEEL							
	Values are in lb/in. of thread penetration							Type B Corrugated			Structural				
	0.67	0.55	0.50	0.46	0.43	0.36	0.31	22 ga.	20 ga.	18 ga.	16 ga.	13 ga.	12 ga.	3/16"	1/4"
SIPTP	1429	1173	1067	981	917	768	661	NA	NA	NA	NA	NA	NA	NA	NA
SIPLD	1429	1173	1067	981	917	768	661	510	645	920	NA	NA	NA	NA	NA
SIPHD	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	770	1130	1690	3100	4500

Average Ultimate Lateral Load Values

	Tensile Strength	Shear Strength	SIP Panel Fastened To				Avg. Ultimate Head Pull Thru Values		
			WOOD		STRUCTURAL				
			Specific Gravity		STEEL				
			0.38	0.45	0.64			7/16" OSB	SIP Panel
SIPTP	3380	2900	720	780	790	NA	545	630	
SIPLD	3380	2900	720	780	790	NA	545	630	
SIPHD	6000	3400	NA	NA	NA	790	545	630	